
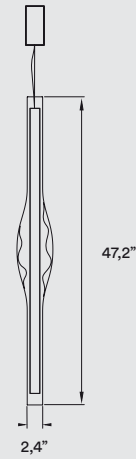


Will be available for production from November 2022



REF.

DUNE SV 120 LED DIM0-10V UL
DUNE SV 120 LED DIMTRIAC UL

LIGHT SOURCE



120 - 277V: Dimmable 0-10V or TRIAC

Drivers:

Constant Current 1400mA

LED Integrated:

Led module

2.700K, CRI>90, 22W, 50-60Hz, 1540 lm*

4.000K, CRI>90, 22W, 50-60Hz, 1540 lm*

*Measurements obtained by theoretical calculations at LZF using ivory white shades. Veneer Ref: 20 Ivory White.

PACKAGING

Box Size: 51 × 13 × 13"

Box Volume: 5,3 ft³

Weight | Gross: 15,7 Lb | Net - 8,8 Lb

MATERIALS & COMPONENTS

Wood Veneer Shade

Matt Satin Acrylic Diffuser

Hand Blown Glass: Borosilicate*

Black Metal Canopy: ø 3" - disc ø 4,5"







Black Coaxial Cable: 2,5 m drop

Black Steel Cable: 2,5 m drop

*Borosilicate glass is highly resistant to thermal shock

FINISHES

WOOD VENEER

- | | | | |
|---|-------------------|--|--------------|
|  | 20 Ivory White |  | 30 Turquoise |
|  | 21 Natural Cherry |  | 33 Pale Rose |
|  | 22 Natural Beech |  | 34 Sea Blue |